

# 19" IP55 Rated Free Standing Enclosures



## DESCRIPTION

Our 19" IP Rated Free Standing Enclosures are engineered to be used in areas of high dust levels and damp environments. They are available from 15U to 42U in widths/depths of 600 x 600; 600 x 800; 800 x 600; 800 x 800: 800x1000 & 800x1200mm as standard and different options are available.

- Steel fully welded assembly
- 1200Kg evenly distributed load rating.
- 19" Adjustable mounting profiles front and rear, with U height position markers.
- Front & Rear Doors - solid steel, fitted with water resistant, dust tight sealing & Fully PE gasket.
- Gasket Protected cable entry from base
- Top mounted fan modules available
- Standard colour is Goose Grey
- Available in grey RAL 7035
- 1.5mm galvanized steel thick metal bearing framework
- 1.5mm steel thick rear & side panels
- Plinth 1.5mm Galvanized Steel
- Mounting rails front & rear
- Plinth as standard fitting
- 135° opening of front door
- Air Inlet Filters are



## FEATURE

### HIGH STRENGTH

It can bear heavy devices thanks to its fully welded extra resistant carcass system and surface panels.

### MAXIMUM TIGHTNESS

It provides protection against dust and water through its gasket structure on fully detachable side, front, rear and bottom panels.

### REAR DOOR

Standard front door model is of metal frame, 4mm, tempered, antistatic, smoothed and of high fracture resistance, full length glass door model.

## GROUNDING

In order to ensure continuity of grounding there is provided connection terminals on each panel.

## BASE MODULE

Base module of H=100mm at the bottom allows cable harness incoming from the bottom to be kept and reserved.



## APPLICATION


Industrial  
Automation  
Indoor/Outdoor  
VDI  
Electrical






## Views


**Rear View**

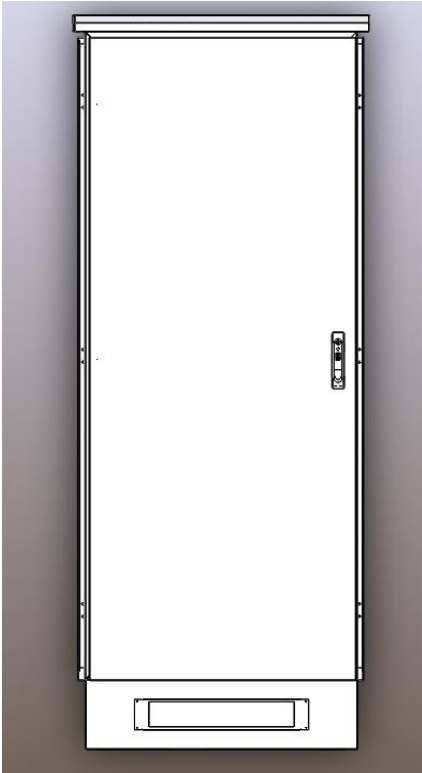


**Front View**

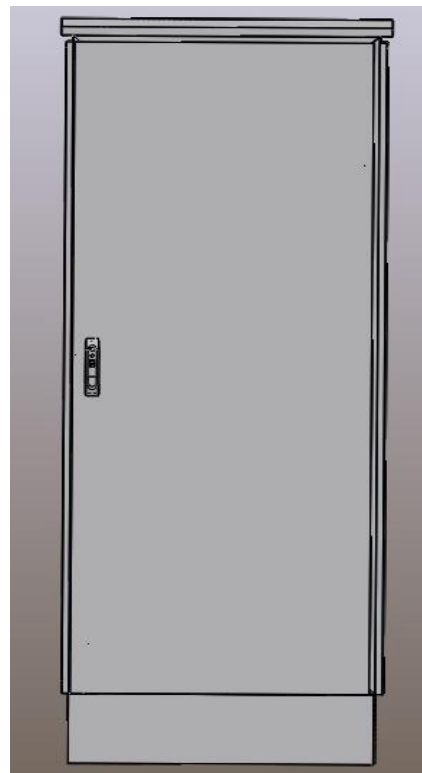

**Internal View**

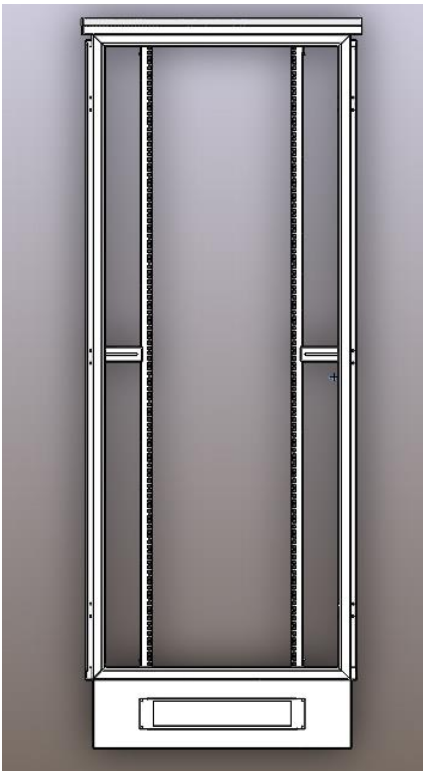


**General View**

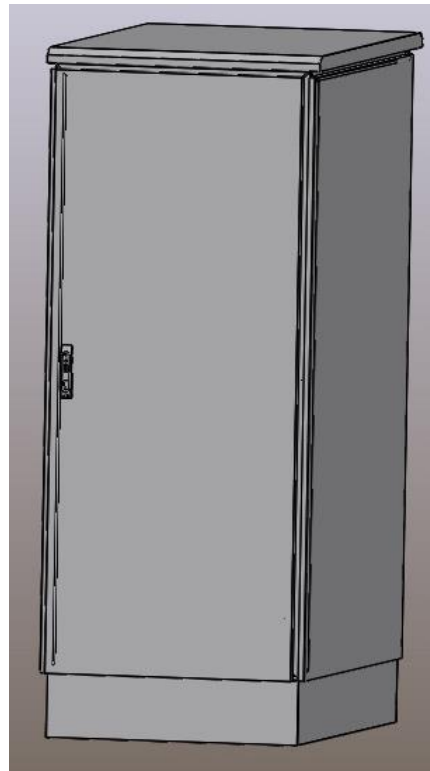




## DRAWINGS


LEFT VIEW

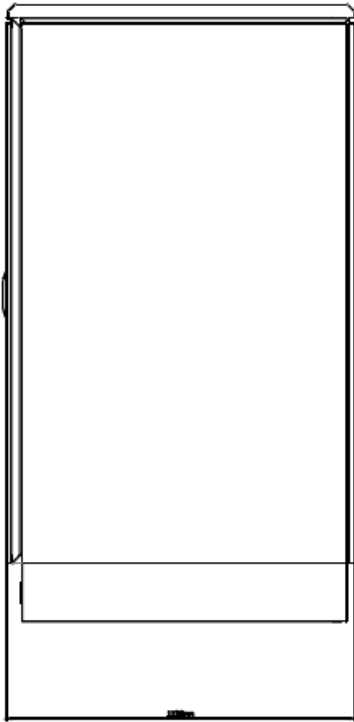


FRONT VIEW

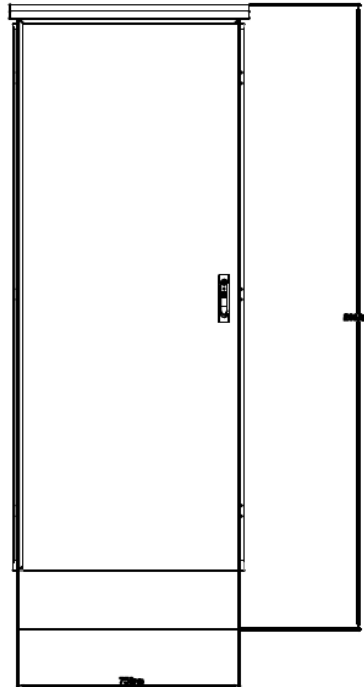


INTERIOR VIEW

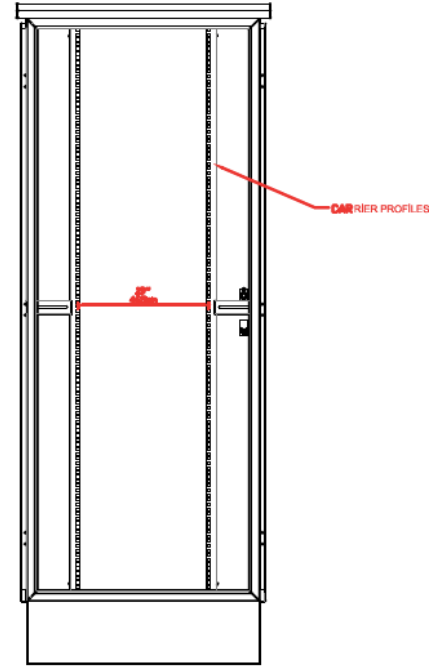

BACK VIEW

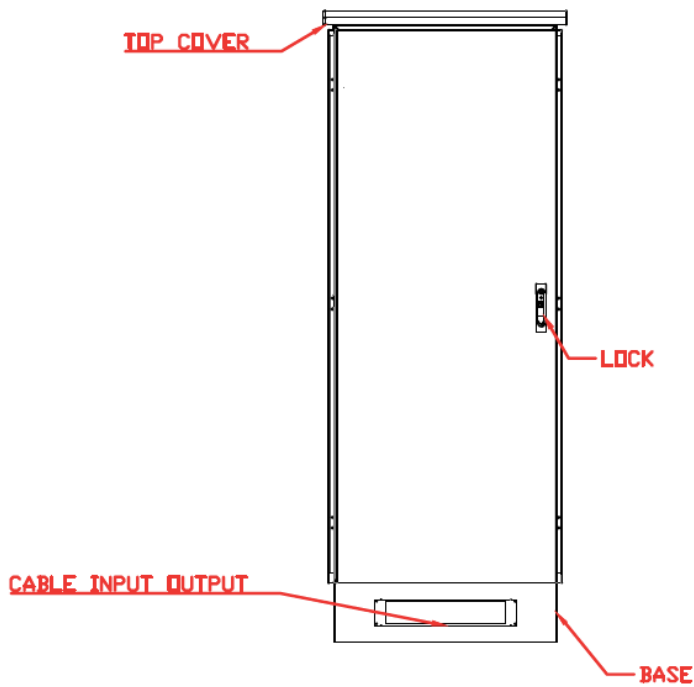

RIGHT VIEW

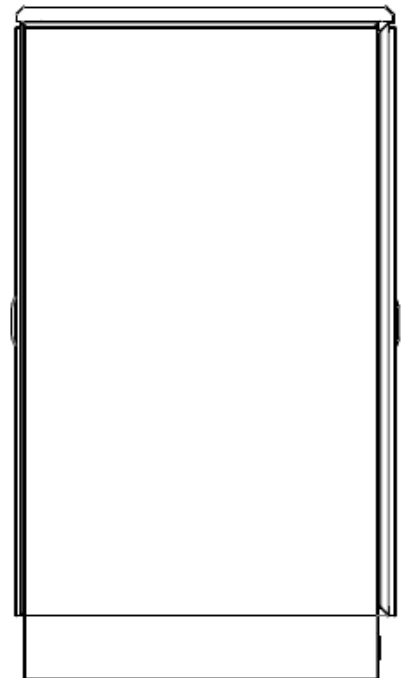

## ORDERING INFORMATION

Product Code	Width (mm.)	Height (With Plinth) (mm.)	Depth (mm.)	Door Qty
UP IP55-6012040-CC	600	1200+100	400	Single
UP IP55-8012040-CC	800	1200+100	400	Single
UP IP55-6016040-CC	600	1600+100	400	Single
UP IP55-8016040-CC	800	1600+100	400	Single
UP IP55-6018040-CC	600	1800+100	400	Single
UP IP55-8018040-CC	800	1800+100	400	Single
UP IP55-10018040-CC	1000	1800+100	400	Double
UP IP55-6020040-CC	600	2000+100	400	Single
UP IP55-8020040-CC	800	2000+100	400	Single
UP IP55-10020040-CC	1000	2000+100	400	Double
UP IP55-6016050-CC	600	1600+100	500	Single
UP IP55-8016050-CC	800	1600+100	500	Single
UP IP55-4018050-CC	400	1800+100	500	Single
UP IP55-6018050-CC	600	1800+100	500	Single
UP IP55-7018050-CC	700	1800+100	500	Single
UP IP55-8018050-CC	800	1800+100	500	Single
UP IP55-10018050-CC	1000	1800+100	500	Double
UP IP55-4020050-CC	400	2000+100	500	Single
UP IP55-6020050-CC	600	2000+100	500	Single
UP IP55-7020050-CC	700	2000+100	500	Single
UP IP55-8020050-CC	800	2000+100	500	Single
UP IP55-10020050-CC	1000	2000+100	500	Double
UP IP55-6012060-CC	600	1200+100	600	Single
UP IP55-8012060-CC	800	1200+100	600	Single
UP IP55-6016060-CC	600	1600+100	600	Single
UP IP55-8016060-CC	800	1600+100	600	Single
UP IP55-4018060-CC	400	1800+100	600	Single
UP IP55-6018060-CC	600	1800+100	600	Single
UP IP55-7018060-CC	700	1800+100	600	Single
UP IP55-8018060-CC	800	1800+100	600	Single
UP IP55-10018060-CC	1000	1800+100	600	Double
UP IP55-4020060-CC	400	2000+100	600	Single
UP IP55-6020060-CC	600	2000+100	600	Single
UP IP55-7020060-CC	700	2000+100	600	Single
UP IP55-8020060-CC	800	2000+100	600	Single
UP IP55-10020060-CC	1000	2000+100	600	Double
UP IP55-4020080-CC	400	2000+100	800	Single
UP IP55-6020080-CC	600	2000+100	800	Single
UP IP55-7020080-CC	700	2000+100	800	Single
UP IP55-8020080-CC	800	2000+100	800	Single
UP IP55-10020080-CC	1000	2000+100	800	Double
UP IP55-60200100-CC	600	2000+100	1000	Single
UP IP55-80200100-CC	800	2000+100	1000	Single
UP IP55-60200120-CC	600	2000+100	1200	Single
UP IP55-80200120-CC	800	2000+100	1200	Single

CC:Color Code. Standart is LG (RAL 7035 Light Gray). For different color options please as