

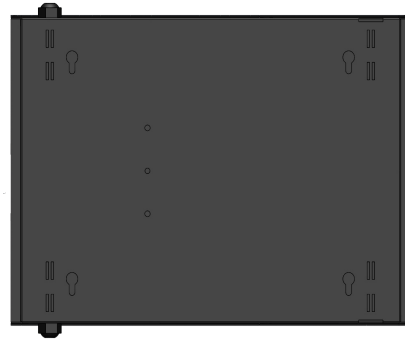
Wall Mount Termination Panel

W-Box Macro

The Faster. The Better



Front View



Rear View

Description

W-Box Macro ST Fiber Optic Termination Panel Wall Mounting Type Fiber Patch Panel
Double Door
Capacity: up to 96Splice
Modular/Changable Adaptor Plate.

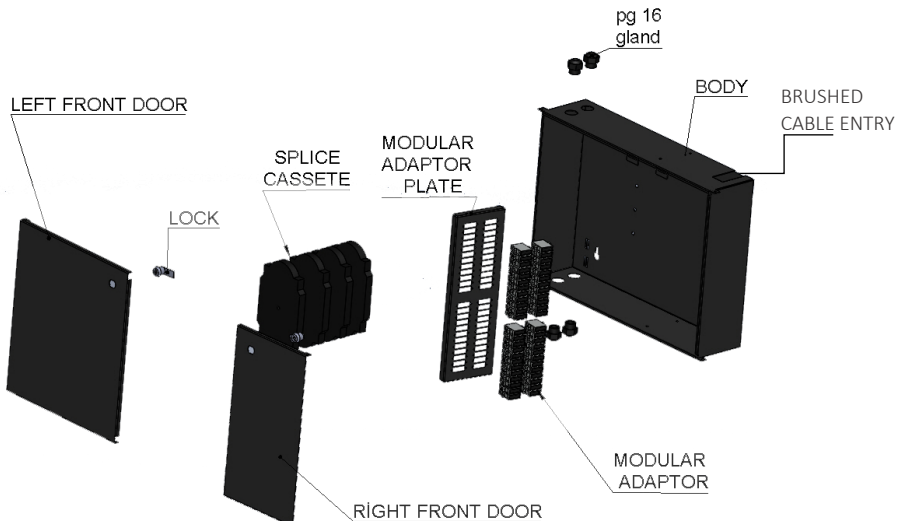
W-BOX MACRO wall mount cabinets designed for internal environment. It is painted with electrostatic spray coating. It's available with 4 splice trays max., cable management for slicing incoming and outgoing cables. Fiber Termination Box is engineered for use as a wall mount interconnect point where termination and connectivity of up to 96 fibers is needed. This solution allows easy access to patch cords and pigtails after opening the hinged front doors. Standard boxes are available empty for complete field configuration, half-loaded with adaptor plates for field termination and cable assembly installation, or stubbed with a factory-installed cable assembly of a user specified length.

Features

Fits comfortably into new and existing interconnect, cross-connect, customer premise, and co-location environments
Most common connector styles and types available
Compatible with industry standard equipment frames
Single door with tube-style keyed lock for flexibility and security
Optional splice tray kit for on site conversion to patch and splice panel

Shipment Configuration

- Splice Tray: 4pcs
- PG16 Plastic Gland: 2pcs
- Plastic Blind Plug Grommet: 4pcs
- Left and Right Front Door
- Modular Adaptor Plate
- Body
- Lock
- Black-RAL9005



Wall Mount Termination Panel



W-Box Macro

The Faster. The Better

Suitable Adapters	SC LC ST or FC
Material	Cold Rolled Steel Plate
Weight	5,25 kg
Outlet	48 Port
Installation way	Wall Mount
Applications	Wall Mount Distribution Use
Compatible Riser Cable Types	Yes
Connector Capacity	96 pcs
Connector Type	SC LC ST or FC
Includes Splitters	No
Location	Wall Mount Usually
Location of Use	<ul style="list-style-type: none">➤ Telecommunications closets➤ HUB/OTN Sites➤ Customer premise➤ Co-Location sites➤ Campus/enterprise environments➤ FTTH / FTTB Networks
Lock Compatible	Spring Lock
Number of Terminal Drops	2 Cables
Number of Trays	4 pcs Max. 24 Fiber Splice per Tray
Product Type	Wall Mount Termination Box
Solution for	Wall Mount Cabling
Max. Splice Capacity	96 fibers
Trademark	UPCOM or Customized

Wall Mount Termination Panel W-Box Macro

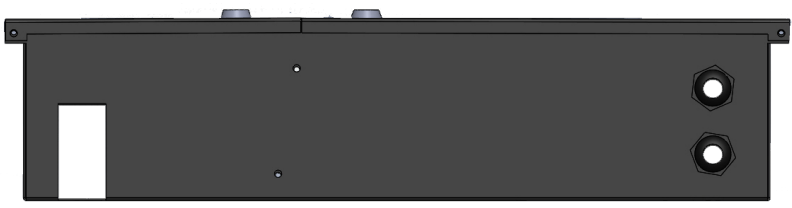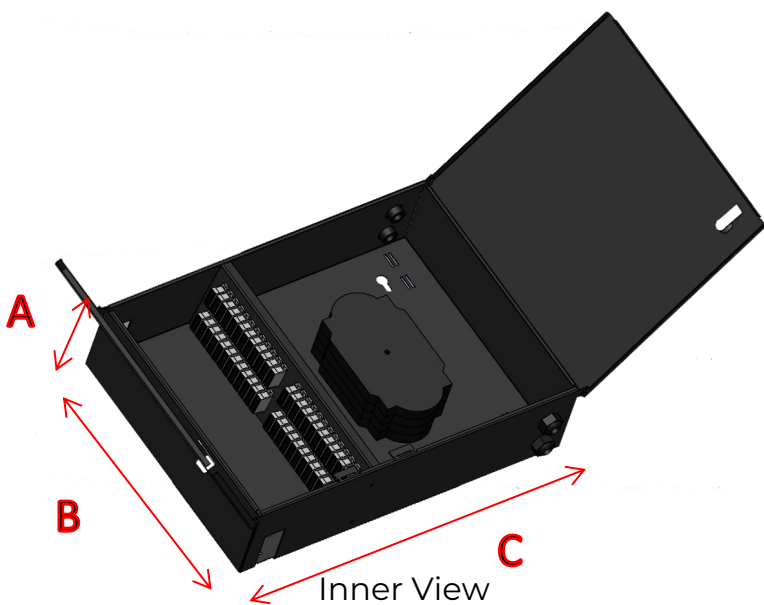The Faster. The Better










Wall Mount Termination Panel

W-Box Macro

The Faster. The Better

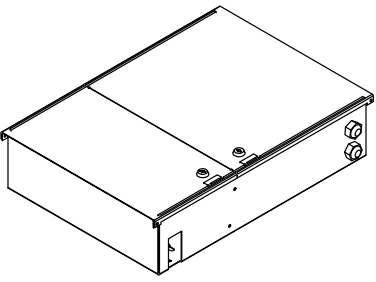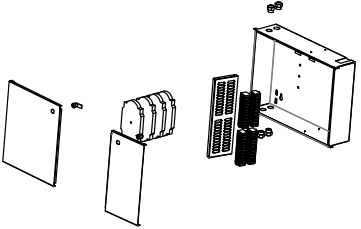Dimensions

<p>FRONT VIEW</p> 	<p>SIDE VIEW</p> 	<p>PERSPECTIVE VIEW</p> 
<p>TOP VIEW</p> 	<p>LOWER VIEW</p> 	<p>EXPLODE VIEW</p> 
		<p>48 PORT SCD WALLBOX DATASHEET</p>

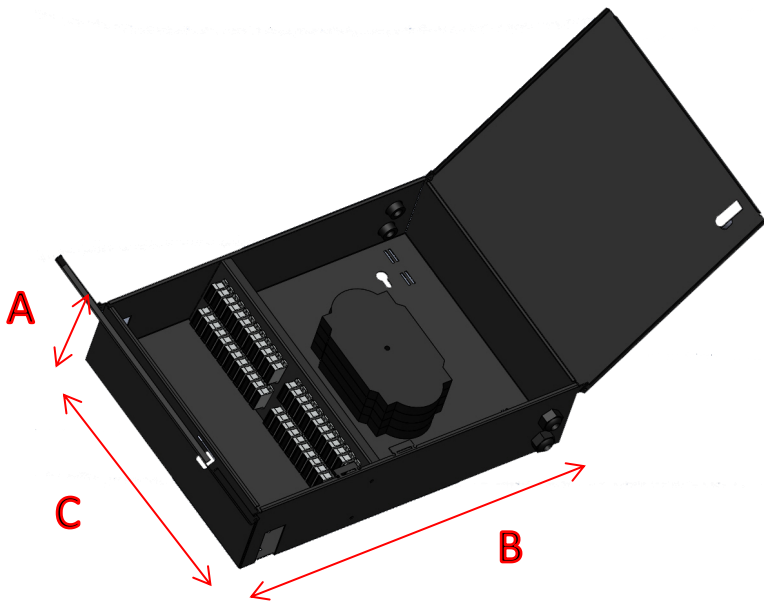

Depth A(mm)	Width B(mm)	Height C(MM)	Max Capacity	Weight Unloaded
110	450	330	96 Splice 48Port	5,25kg

This document is a property of UPCOM and must not be copied or damaged in any form, wholly or in part w/o written permission from UPCOM. Specifications indicated in this document are not contractual and can be modified w/o notification.

Wall Mount Termination Panel

W-Box Macro

The Faster. The Better

Ordering Code: UP-SK-DVR-**-MC-BL

W-Box Macro Fiber Optic Termination Panel Wall Mounting Type Fiber Patch Panel - Double Door - Capacity: up to 96Splice - Modular/Changable Adaptor Plate - Black-RAL9005

Order No	Product Description
UP-SK-DVR- ST -MC-BL	W-Box Macro ST Fiber Optic Termination Panel Wall Mounting Type Fiber Patch Panel - Double Door - Capacity: up to 96Splice - Modular/Changable Adaptor Plate - Black-RAL9005



XX-Write the desired Adaptor Type

- SC
- LC
- ST
- FC