



1U 19" Single Phase Aluminum 6xC13 with Circuit Breaker 1,8mt 3x1,5mm² Power Cable and UPS Plug

DESIGN & MATERIAL

Plastic Material	Fire Retardant Nylon 6 v0 or v2
Body Material	Aluminum Body
Sockets	6xIEC 320 C13
Cable Options	1,5 Mtr / 1,8 Mtr / 2 Mtr / 3 Mtr / 5 Mtr 3x1,5 mm² / 3x2,5 mm ² / 3x4 mm ² / 3x6 mm ²
Rack Mount	Vertical Rack Mountable
Contacts	Contacts: Brass
Protection	16A Circuit Breaker On/Off Switch Surge Protect CE voltmeter
Certificate	
Warranty	Lifetime (On Production Based Errors)

ELECTRICAL & ENVIROMENTAL

Cable Plug Type Options	UPS (DIN49441) IEC 320 C14 CEE NORM 16A (EN60309) UK 13A (BS1363)
Max. Output power	4000W (220V)
Nominal Input Voltage	100-240VAC
Max. Total Current Draw	16A
Operable Humidity	% 5-95
Operable Temperature	-5°C to +45°C
Storage Temperature	-25°C to +65°C

Highlights


- 19" Rack Mountable
- Rotating Installation Ears
- Aluminum Body
- Fire-retardant plastic material
- Fuse Box designed to prevent accidental shutdowns
- Mounting ears create isolation between rack cabinets and PDU
- Arc flash proof sockets
- 100% Brass socket contacts
- Design Certification

The Package Includes

- PDU
- Screw&Nut Set for installation

Options

- Fixed Plastic Mounting Ear Option
- Cable Length/Plug type on demand
- 3/6/9/12 Way Options
- **Voltmeter** / Ammeter
- Color Options

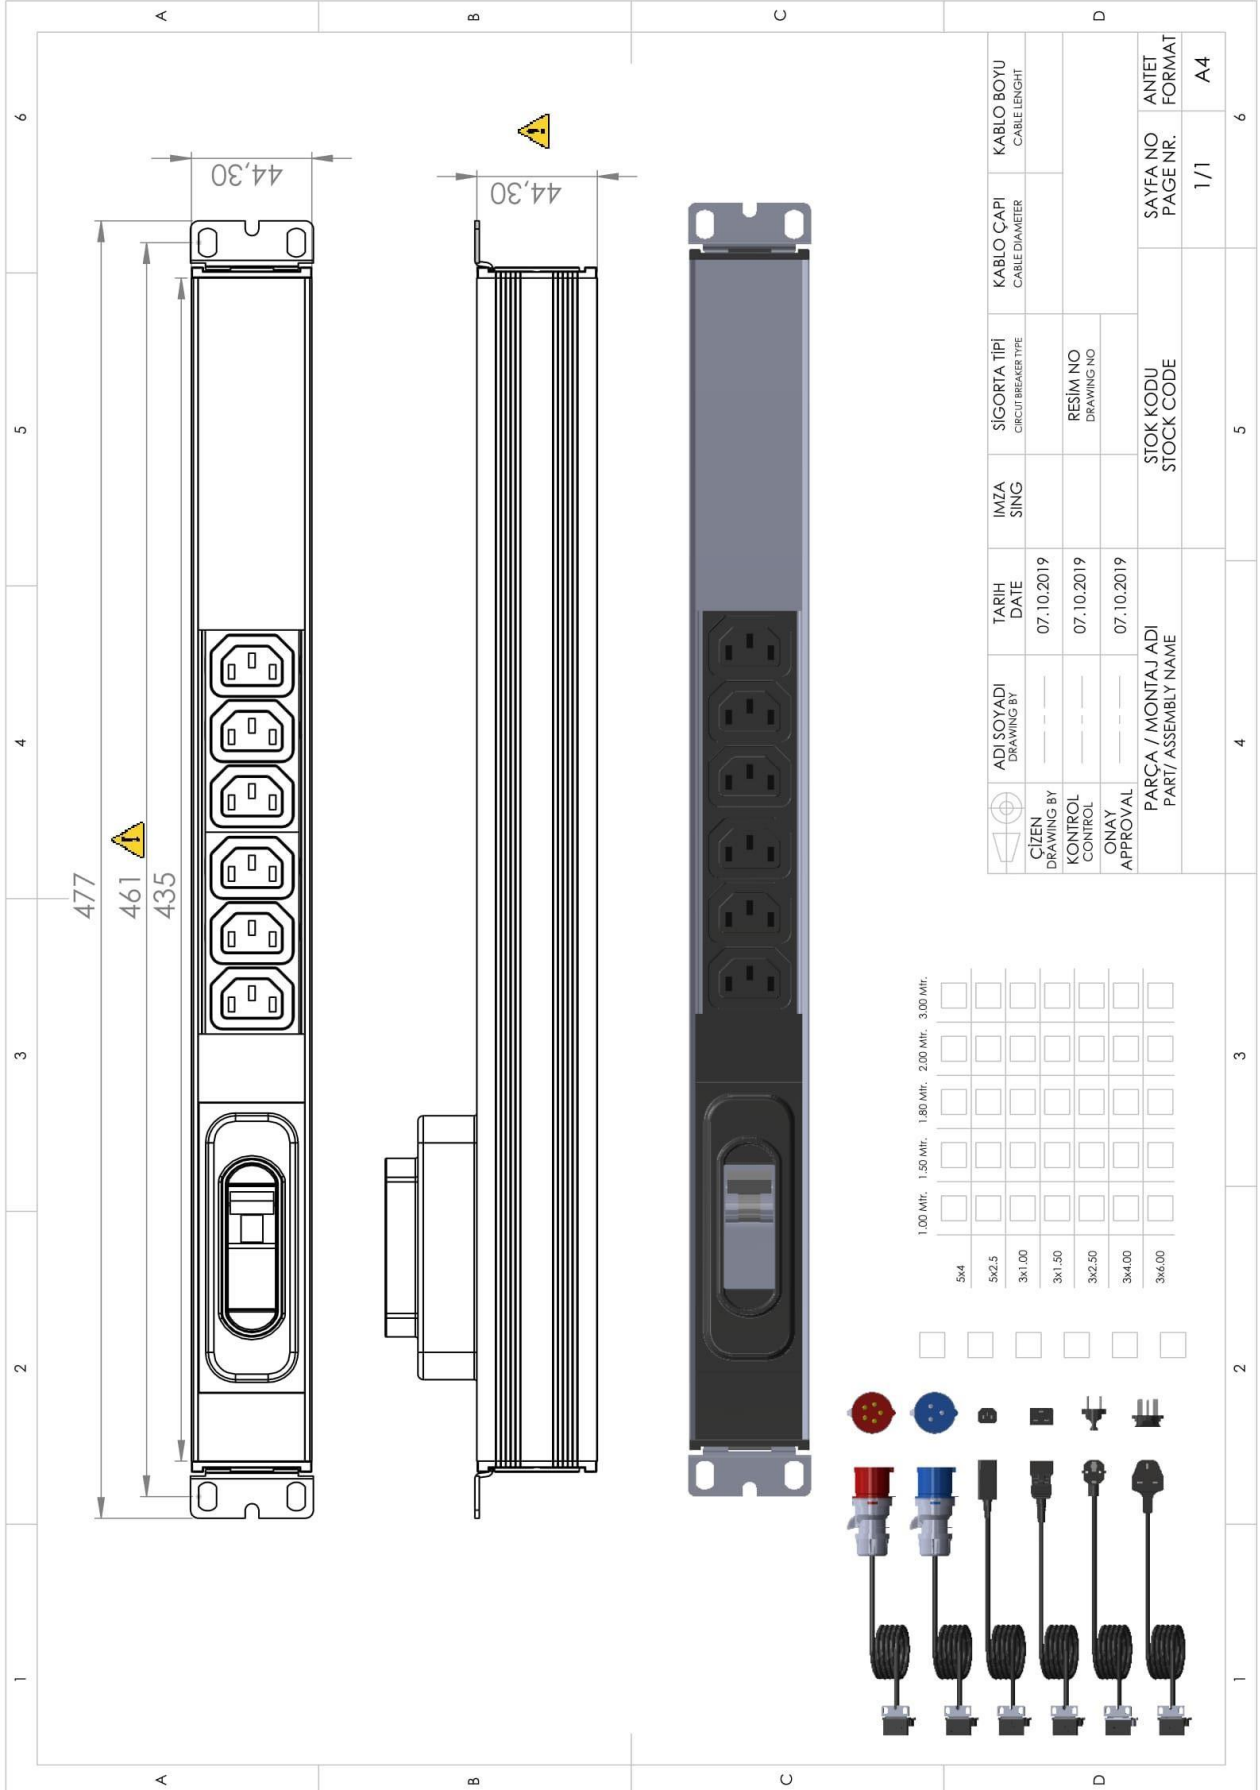

ADI SOYADI DRAWING BY	TARİH DATE	İMZA SIGN	SİGORTA TİPİ CIRCUIT BREAKER TYPE	KABLO ÇAPINI CABLE DIAMETER	KABLO BOYU CABLE LENGTH
---	07.10.2019	---	---	---	---
ÇİZEN DRAWING BY	KONTROL CONTROL	ONAY APPROVAL	RESİM NO DRAWING NO		
---	---	---	---		
PARÇA / MONTAJ ADI PART / ASSEMBLY NAME			STOK KODU STOCK CODE	SAYFA NO PAGE NR.	ANİTET FORMAT
				1/1	A4