



ZeroU Single Phase Vertical Aluminum 16 Schuko Socket with Circuit Breaker 2mt 3x2,5mm² Power Cable and 32A CEE Norm Plug

DESIGN & MATERIAL

Plastic Material	Fire Retardant Nylon 6 v0 or v2
Body Material	Aluminum Body
Sockets	16xSchuko Sockets (DIN 49440)
Cable Options	1,5 Mtr / 1,8 Mtr / 2 Mtr / 3 Mtr / 5 Mtr 3x1,5 mm ² / 3x2,5 mm² / 3x4 mm ² / 3x6 mm ²
Rack Mount	Vertical Rack Mountable
Contacts	Contacts: Brass
Protection	16A Circuit Breaker On/Off Switch Surge Protect Voltmeter
Certificate	
Warranty	Lifetime (On Production Based Errors)

ELECTRICAL & ENVIROMENTAL

Cable Plug Type Options	CEE NORM 32A (EN60309) UPS (DIN49441) IEC 320 C14 UK 13A (BS1363)
Max. Output power	7000W (220V)
Nominal Input Voltage	100-240VAC
Max. Total Current Draw	32A
Operable Humidity	% 5-95
Operable Temperature	-5°C to +45°C
Storage Temperature	-25°C to +65°C

Highlights


- 19" Rack Mountable
- Rotating Installation Ears
- Aluminum Body
- Fire-retardant plastic material
- Fuse Box designed to prevent accidental shutdowns
- Mounting ears create isolation between rack cabinets and PDU
- Arc flash proof sockets
- 100% Brass socket contacts
- Design Certification

The Package Includes

- PDU
- Screw&Nut Set for installation

Options

- Fixed Plastic Mounting Ear Option
- Cable Length/Plug type on demand
- 3/6/9/12 Way Options
- Voltmeter / Ammeter
- Color Options

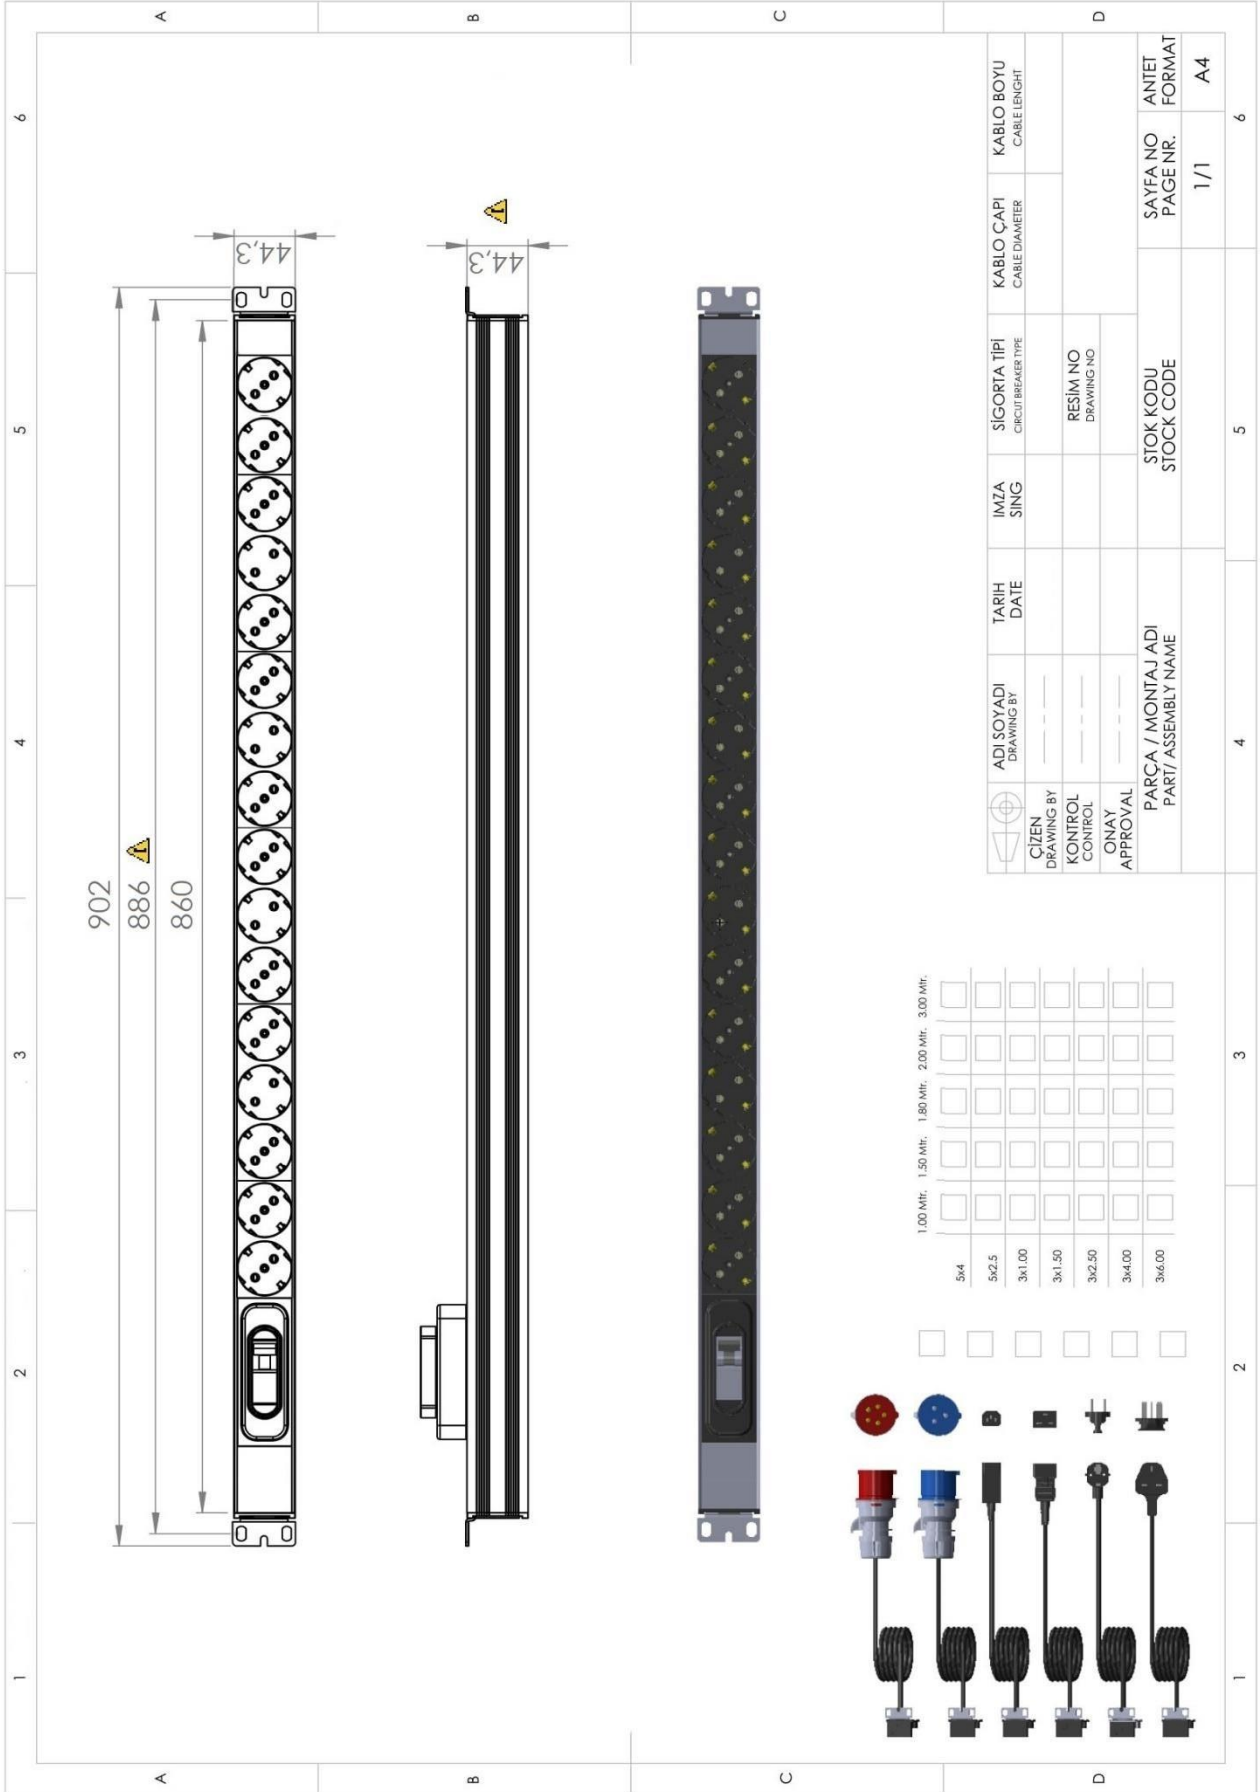

ADI SOYADI DRAWING BY	TARİH DATE	İMZA SIGN	SİGORTA TİPİ CIRCUIT BREAKER TYPE	KABLO ÇAPİ CABLE DIAMETER	KABLO BOYU CABLE LENGTH
ÇİZEN DRAWING BY					
KONTROL CONTROL			RESİM NO DRAWING NO		
ONAY APPROVAL					
PARÇA / MONTAJ ADI PART / ASSEMBLY NAME			STOK KODU STOCK CODE		SAYFA NO PAGE NR.
					1/1
					ANİTET FORMAT A4