

I-V(ZN)HH Nx1

Tight Buffer Breakout Single LSZH Jacket Indoor Type Fiber Optic Cable

Overview - I-V(ZN)HH Nx1

Breakout cables I-V(ZN)HH Nx1 are designed to use in Vertical Riser and General Horizontal Applications. 2.0mm sun-units are longitudinally applied. 2.0 mm-breakout elements consist of 900µm tight buffers contains aramide yarn inside. To comply with the strict fire safety requirements for indoor applications, cables with halogen-free and flame-retardant cladding are required, since these ensure that a fire is not propagated further along cables, and that cables do not produce corrosive or toxic gases. Ripcord is available under cable outer jacket.

Compliance

- DIN DIN VDE 0888 Part 6; IEC 61034; IEC 60332-1&2; IEC 60754-2; IEC 60794-1&2


Application

- LAN
- Inter Building and Intrabuilding Voice or Data Communication
- Networks
- WAN
- Installed in Ducts & Conduits
- Vertical Riser and General Horizontal Applications
- LAN
- Fttx Cabling
- Breakout Design Permitting Routing to Different Locations and
- Direct Termination of the Fibers in the Field
- Fan Out

Features and Benefits

- Easy to Strip Direct Termination
- Easy to Strip
- Direct Termination
- Flexible & Reduced Diameter
- Complete Dry Design
- All Dielectric
- Halogen Free Fire Retardant / Low Smoke Zero Halogen
- Low Cost
- Rodent Resistant (The version with Glass Yarn)
- Enforcement with Non-Metallic Strength Members
- Non Metallic Design

This document is a property of UPCOM Telekom and must not be copied or damaged in any form, wholly or in part w/o written permission from UPCOM Telekom specifications indicated in this document are not contractual and can be modified w/o notification.

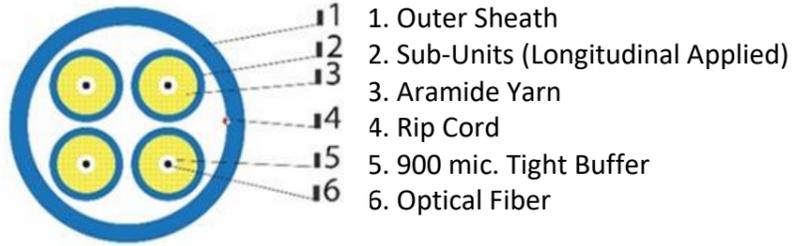

Specification

Fibers	2	4	6	8	12	16	24
Strength members	Aramid Yarns						
Sub-unit Ø (mm)	2.0						
Sub-unit jacket	LSZH						
Identification	Numbers/Colors						
Outer jacket	LSZH						
Weight (Kg/Km)	45	52	70	90	115	125	140
Outer Ø (mm)	6.6	6.8	9.0	10.5	11.0	12.5	14.0
Tensile Load Perm / Inst (N)	600/1000	800/1350	1200/2050	1600/2700	2400/3500	3200/3500	3500/4500
Optical Characteristics	62,5/125 OM1		50/125 OM2	50/125 OM3	50/125 OM4	9/125 G.652-D	9/125 G.657A
Bandwidth (nm)	850/1300		850/1300	850/1300	850/1300	1310/1550	1310/1550
Attenuation (max dB/km)	3.2/1.2		3.0/1.0	2.8/0.8	2.7/0.7	0.34/0.25	0.34/0.22
Crush (N)	2000 (IEC 60794-1-2 E3)						
Temperature Range	-20 °C to +60 °C (IEC 60794-1-2 F1)						
Min. Bending Radius	20 x Outer Ø (IEC 60794-1-2 E11)						

This document is a property of UPCOM Telekom and must not be copied or damaged in any form, wholly or in part w/o written permission from UPCOM Telekom specifications indicated in this document are not contractual and can be modified w/o notification.