UPC-SLI-5U / 19-INCH ENCLOSURE

5U low-profile vertical wall-mount rack cabinet



140 mm wall projection

The closed cabinet projects 140 mm from the wall. Two separate sets of 19-inch mounting positions provide 3U at the front and 2U at the rear.

The hinged housing opens for access to the rails and the lower rear cable entry.

Model specifications

Order code	UPC-SLI-5U
19-inch mounting positions	3U front + 2U rear
Enclosure dimensions[1]	500 × 480 × 140 mm
Cabinet net weight	9 kg
Equipment load capacity	20 kg
Enclosure protection	IP20, indoor
Construction	Powder-coated steel, acrylic window[2]
Available finishes	RAL 7035 light grey / RAL 9005 black

[1] Closed cabinet. The wall face measures 500 × 480 mm. [2] Cylinder lock on the hinged cover.

UPC-SLI-5U

Cabinet finishes

RAL 7035 / Light grey



RAL 9005 / Black



Closed cabinet with locking front cover and acrylic viewing window.

UPC-SLI-5U

Interior and wall mounting



Light grey, cover open



Black, cover open



Wall mounting, window at the top




Wall mounting, window at the side

Both mounting views show the closed cabinet on a wall. Wall projection is 140 mm.


UPC-SLI-5U

Dimensional drawings


Dimensions in mm. H = 140 mm. The detail shows the cover open.

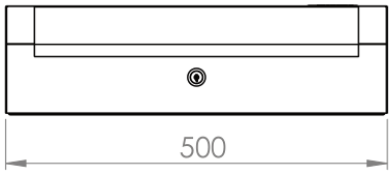


Front

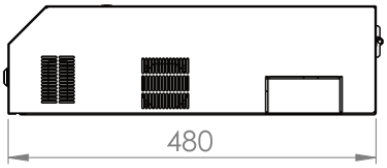


Side

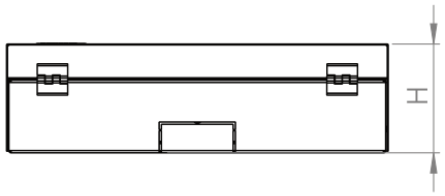


Rear

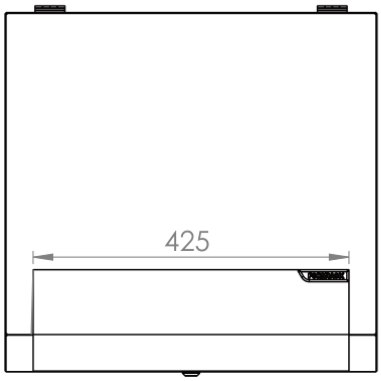

Top

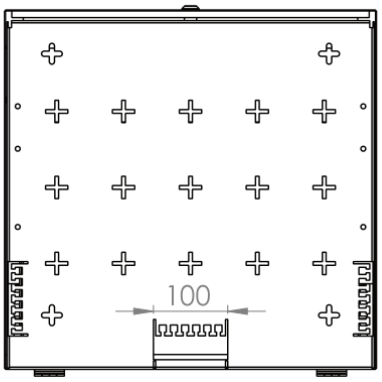

Bottom

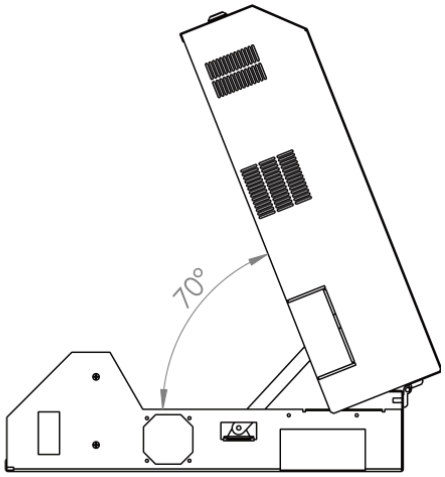

Opening detail

Equipment layout

Allocate equipment separately to the 3U front and 2U rear positions. Check device dimensions, connector clearance and cable bends against the intended layout. Allow room for the hinged cover to open for service.