Rack cabinets & data center solutions

19-inch enclosures, cold aisle containment, power and rack accessories.



Cold aisle containment with bayed server cabinets and sliding end doors.

Contents

Wall-mount cabinets	Alpine Line, SOHO and low-profile cabinet	02–03
Floor-standing cabinets	Oxoline, Basicline, Medi Line and Server Rack	04–07
Outdoor cabinets	IP66 wall, floor and pole mounting	08–10
Project configurations	IP55 enclosures and non-standard dimensions	11
Data center solutions	Containment, micro data centers, cooling, UPS and KVM	12–18
Rack accessories	Shelves, fan modules, PDUs, cable routing and fittings	19–23
Product views	Cabinet installation details and rack accessories	24–25

UPCOM Telekomünikasyon Bilişim Teknolojileri San. ve Tic. Ltd. Şti.
Küçüksu Mah. Rasathane Cad. No. 35R2, D. 2, 34684 Üsküdar, Istanbul, Türkiye
+90 535 765 18 57 | info@upcom.com.tr | www.upcom.com.tr

19-INCH WALL-MOUNT CABINETS

Alpine Line

Wall-mounted housing for patch panels, switches and other network equipment.



600 mm depth series in light grey

Cabinet specification

ENCLOSURE

IP20 protection and 120 kg load capacity.

DOOR AND PANELS

Lockable 4 mm smoked tempered glass door.
Removable side panels for access.

MOUNTING

Depth-adjustable, U-marked 19-inch rails.


FINISH

Electrostatic powder coating.
RAL 7035 light grey or RAL 9005 black.

Model selection

Column headings give the external cabinet width × depth. Dimensions in mm.

Rack height	External H	553 × 450	553 × 560	600 × 600
7U	371	UPC-ALPI-7U450	UPC-ALPI-7U560	UPC-ALPI-7U600
9U	460	UPC-ALPI-9U450	UPC-ALPI-9U560	UPC-ALPI-9U600
12U	593	UPC-ALPI-12U450	UPC-ALPI-12U560	UPC-ALPI-12U600
16U	771	UPC-ALPI-16U450	UPC-ALPI-16U560	UPC-ALPI-16U600
20U	949	UPC-ALPI-20U450	UPC-ALPI-20U560	UPC-ALPI-20U600

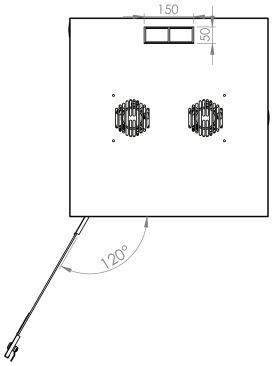

INSTALLATION DETAIL

Front door clearance

The front door opens through 120°. Allow room for the door swing and side-panel removal.

The 600 mm-deep cabinet has four mounting rails. Cable entry is available at the top and bottom.


Shelf and fan selection / p. 19

UPCOM Telekomünikasyon Bilişim Teknolojileri San. ve Tic. Ltd. Şti.
Küçüksu Mah. Rasathane Cad. No. 35R2, D. 2, 34684 Üsküdar, Istanbul, Türkiye
+90 535 765 18 57 | info@upcom.com.tr | www.upcom.com.tr

19-INCH WALL-MOUNT CABINETS

Compact wall cabinets

Choose a 400 mm-deep SOHO cabinet or a hinged low-profile enclosure.

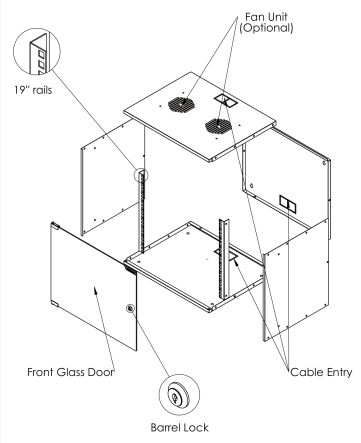

SOHO

19-inch indoor cabinet with a 4 mm smoked tempered glass door. Cable entry at the top, bottom and rear.



Low-profile 5U

Hinged enclosure with 3U at the front and 2U at the rear. The two mounting positions share one housing.

SOHO model selection

External width × depth is 510 × 400 mm. All four sizes are rated IP20 with a 50 kg load capacity.

Rack height	External H (mm)	UPCOM order code
4U	225	UPC-SOHO-4U
7U	358	UPC-SOHO-7U
9U	448	UPC-SOHO-9U
12U	582	UPC-SOHO-12U

Low-profile model

20 kg load capacity. Cable entry is at the bottom rear. The mounting rails are U-marked.

Mounting space	External W × D × H (mm)	UPCOM order code
3U + 2U	500 × 480 × 140	UPC-SLI-5U

Project-specific wall cabinets / p. 11

UPCOM Telekomünikasyon Bilişim Teknolojileri San. ve Tic. Ltd. Şti.
Küçüksu Mah. Rasathane Cad. No. 35R2, D. 2, 34684 Üsküdar, Istanbul, Türkiye
+90 535 765 18 57 | info@upcom.com.tr | www.upcom.com.tr

19-INCH FLOOR-STANDING CABINETS

Oxoline

Five cabinet footprints for indoor network patching and switching.



600 × 800 mm nominal model with optional castors

Cabinet specification

ENCLOSURE

IP20 with lockable side and rear panels.

FRONT DOOR

4 mm smoked tempered glass.
120° opening with a key-operated swing handle.

MOUNTING

Four depth-adjustable, U-marked 19-inch rails.

CABLE ENTRY (600 × 800 MM MODEL)

Bottom entry has a brush. Top brush optional.

FINISH

Electrostatic powder coating.
RAL 7035 light grey or RAL 9005 black.

Model selection

Select the nominal footprint, then read down to the required rack height. Dimensions in mm.

Nominal W × D		600 × 600	600 × 800	600 × 1000	800 × 800	800 × 1000
External W × D		600 × 600	600 × 780	600 × 1000	780 × 780	780 × 1000
Load (kg)		800	800	1,200	800	1,200
Rack	Ext. H	UPCOM ORDER CODES				
16U	942	UPC-0X0-16U6060	UPC-0X0-16U6080	UPC-0X0-16U60100	–	–
20U	1120	UPC-0X0-20U6060	UPC-0X0-20U6080	UPC-0X0-20U60100	–	–
26U	1386	UPC-0X0-26U6060	UPC-0X0-26U6080	UPC-0X0-26U60100	–	–
32U	1653	UPC-0X0-32U6060	UPC-0X0-32U6080	UPC-0X0-32U60100	UPC-0X0-32U8080	UPC-0X0-32U80100
36U	1831	UPC-0X0-36U6060	UPC-0X0-36U6080	UPC-0X0-36U60100	UPC-0X0-36U8080	UPC-0X0-36U80100
42U	2098	UPC-0X0-42U6060	UPC-0X0-42U6080	UPC-0X0-42U60100	UPC-0X0-42U8080	UPC-0X0-42U80100

For unlisted sizes, contact UPCOM with the required rack height, width and depth.



Front



Side

INSTALLATION DETAIL

Nominal size and installation depth

The 600 × 800 mm model has a 780 mm-deep body. Use its nominal depth of 800 mm to select the shelf on page 19.

Shelf and fan selection / p. 19

UPCOM Telekomünikasyon Bilişim Teknolojileri San. ve Tic. Ltd. Şti.
Küçüksu Mah. Rasathane Cad. No. 35R2, D. 2, 34684 Üsküdar, Istanbul, Türkiye
+90 535 765 18 57 | info@upcom.com.tr | www.upcom.com.tr

19-INCH FLOOR-STANDING CABINETS

Basicline

Glass-door network cabinets for switching, patching and structured cabling.



42U, 600 × 600 mm model

Cabinet specification

ENCLOSURE

IP20 with removable, lockable panels.

FRONT DOOR

4 mm smoked tempered glass in a metal frame.

MOUNTING

Four adjustable 19-inch rails with U markings.

FINISH

Electrostatic powder coating.
RAL 7035 light grey or RAL 9005 black.

Model selection

Select by nominal footprint and rack height. External dimensions are in mm.

Nominal W × D		600 × 600	600 × 800	600 × 1000	800 × 800	800 × 1000
External W × D		600 × 600	600 × 780	600 × 1000	780 × 780	780 × 1000
Load (kg)		800	800	1,200	800	1,200
Rack	Ext. H	UPCOM ORDER CODES				
12U	764	UPC-BASI-12U6060	UPC-BASI-12U6080	UPC-BASI-12U60100	-	-
16U	940	UPC-BASI-16U6060	UPC-BASI-16U6080	UPC-BASI-16U60100	-	-
20U	1118	UPC-BASI-20U6060	UPC-BASI-20U6080	UPC-BASI-20U60100	-	-
26U	1384	UPC-BASI-26U6060	UPC-BASI-26U6080	UPC-BASI-26U60100	UPC-BASI-26U8080	UPC-BASI-26U80100
32U	1651	UPC-BASI-32U6060	UPC-BASI-32U6080	UPC-BASI-32U60100	UPC-BASI-32U8080	UPC-BASI-32U80100
36U	1829	UPC-BASI-36U6060	UPC-BASI-36U6080	UPC-BASI-36U60100	UPC-BASI-36U8080	UPC-BASI-36U80100
42U	2096	UPC-BASI-42U6060	UPC-BASI-42U6080	UPC-BASI-42U60100	UPC-BASI-42U8080	UPC-BASI-42U80100





INSTALLATION DETAIL

Equipment access

The 600 × 600 mm reference model has removable side and rear covers and provision for a two- or four-fan roof unit.

UPCOM Telekomünikasyon Bilişim Teknolojileri San. ve Tic. Ltd. Şti.
Küçüksu Mah. Rasathane Cad. No. 35R2, D. 2, 34684 Üsküdar, Istanbul, Türkiye
+90 535 765 18 57 | info@upcom.com.tr | www.upcom.com.tr

19-INCH FLOOR-STANDING CABINETS

Medi Line

A 600 × 600 mm network cabinet for equipment rooms with compact floor layouts.



Frame with panels removed and optional castors

Cabinet specification

ENCLOSURE

IP20 with a 600 kg load capacity.

DOOR AND PANELS

4 mm smoked tempered glass front door.
Removable side and rear panels.

MOUNTING

Four adjustable, U-marked 19-inch rails.

FINISH

Electrostatic powder coating.
RAL 7035 light grey or RAL 9005 black.

Model selection

Each code identifies a cabinet with an external width and depth of 600 mm.

Rack height	External W × D (mm)	External H (mm)	UPCOM order code
12U	600 × 600	700	UPC-MEDI-12U6060
16U	600 × 600	877	UPC-MEDI-16U6060
20U	600 × 600	1055	UPC-MEDI-20U6060
26U	600 × 600	1321	UPC-MEDI-26U6060

Cable and fan access

The 12U, 600 × 600 mm model provides brushed cable entry and roof provision for a two- or four-fan unit. Select the fan and controls to suit the equipment load.

Shelf and fan options / p. 19

19-INCH SERVER CABINETS

Server Rack

Deep floor-standing cabinets for rack-mounted servers and storage equipment.



42U enclosure, nominal 800 × 1000 mm

Cabinet specification

ENCLOSURE

IP20. Rated static load is 1,500 kg.

DOORS

Perforated front and rear steel doors.

MOUNTING

Four depth-adjustable, U-marked 19-inch rails.

FINISH

Electrostatic powder coating.
RAL 7035 light grey or RAL 9005 black.

1,000 mm-deep cabinets


Widths shown in the table are measured external widths. Heights are in mm.


Rack height	External H	600 × 1000 mm	780 × 1000 mm
26U	1386	UPC-SVRC-26U60100	-
32U	1653	UPC-SVRC-32U60100	UPC-SVRC-32U80100
36U	1831	UPC-SVRC-36U60100	UPC-SVRC-36U80100
42U	2098	UPC-SVRC-42U60100	UPC-SVRC-42U80100

1,200 mm-deep configurations

Quote by rack height and external width.

External W × D (mm)	Rack heights	Ordering
600 × 1200	26U, 32U, 36U, 42U	By configuration
780 × 1200	32U, 36U, 42U	By configuration





INSTALLATION DETAIL

Door configuration

For server aisles, confirm door perforation, rail spacing and the clearance needed for the equipment and its cabling.

OUTDOOR 19-INCH ENCLOSURES

IP66 wall cabinets

Wall-mounted enclosures for outdoor network and telecommunications equipment.



Wall cabinet with rear mounting brackets

Cabinet specification

ENCLOSURE

IP66. Available with single or double walls.

DOOR AND CABLE ENTRY

Lockable front door. Bottom cable entry.

MOUNTING

U-marked 19-inch rails.
300 kg cabinet load capacity.

OUTDOOR FINISH

Electrostatic powder coating in RAL 7035.

Model selection

600 mm external width. Choose the depth and wall construction. External heights are in mm.

Rack	Ext. H	450 mm / single	450 mm / double	600 mm / single	600 mm / double
7U	486	UPC-EXT-7U450D	UPC-EXT-7U450DW	UPC-EXT-7U600D	UPC-EXT-7U600DW
9U	575	UPC-EXT-9U450D	UPC-EXT-9U450DW	UPC-EXT-9U600D	UPC-EXT-9U600DW
12U	708	UPC-EXT-12U450D	UPC-EXT-12U450DW	UPC-EXT-12U600D	UPC-EXT-12U600DW
16U	886	UPC-EXT-16U450D	UPC-EXT-16U450DW	UPC-EXT-16U600D	UPC-EXT-16U600DW
20U	1063	UPC-EXT-20U450D	UPC-EXT-20U450DW	UPC-EXT-20U600D	UPC-EXT-20U600DW

Mounting and service access

Allow access above the cabinet for the opening roof and below it for cable glands. Check the supporting structure and fixings against the installed weight.

Outdoor fans and cabinet heaters / p. 10

OUTDOOR 19-INCH ENCLOSURES

IP66 floor cabinets

Ground-mounted enclosures for field equipment on a 100 mm plinth.



Field cabinet on a 100 mm plinth

Cabinet specification

ENCLOSURE

IP66. Available with single or double walls.

DOOR AND CABLE ENTRY

Lockable front door. Bottom cable entry.

MOUNTING

U-marked 19-inch rails.
600 kg cabinet load capacity.

OUTDOOR FINISH

Electrostatic powder coating in RAL 7035.

Model selection

600 mm external width. Choose the depth and wall construction. External heights are in mm.

Rack	Ext. H	450 mm / single	450 mm / double	600 mm / single	600 mm / double
7U	586	UPC-EXT-7U450Z	UPC-EXT-7U450ZW	UPC-EXT-7U600Z	UPC-EXT-7U600ZW
9U	675	UPC-EXT-9U450Z	UPC-EXT-9U450ZW	UPC-EXT-9U600Z	UPC-EXT-9U600ZW
12U	808	UPC-EXT-12U450Z	UPC-EXT-12U450ZW	UPC-EXT-12U600Z	UPC-EXT-12U600ZW
16U	986	UPC-EXT-16U450Z	UPC-EXT-16U450ZW	UPC-EXT-16U600Z	UPC-EXT-16U600ZW
20U	1163	UPC-EXT-20U450Z	UPC-EXT-20U450ZW	UPC-EXT-20U600Z	UPC-EXT-20U600ZW

Plinth and cable entry

The table gives the overall cabinet height including the 100 mm plinth. For example, the 12U floor cabinet is 808 mm high. Cable access is from below.

Outdoor fans and cabinet heaters / p. 10

OUTDOOR 19-INCH ENCLOSURES

IP66 pole cabinet

A mast-mounted enclosure for surveillance, communications and field equipment.



Pole-mount enclosure with rear fixing points

Cabinet specification

ENCLOSURE

9U. IP66. Cabinet load capacity of 300 kg.

MOUNTING

U-marked rails and four camera fixing points.

CABLE ENTRY

Rear pipe provision for concealed cable entry.

OUTDOOR FINISH

RAL 7035 light grey.
Zirconium and zinc corrosion pretreatment.

Cabinet selection

Confirm the pole diameter, fixing method and fitted equipment weight for each installation.

Rack height	External W × D × H (mm)	UPCOM order code
9U	600 × 450 × 486	UPC-MBS-9U450

Outdoor temperature-control options

Options for IP66 wall-mount and floor-standing cabinets. Confirm suitability for pole-mount installations.

Accessory	Configuration	UPCOM order code
Outdoor roof fan module	1 fan, digital thermostat	UPC-F024F10T
Outdoor roof fan module	2 fans, digital thermostat	UPC-F024F20T
Cabinet heater with thermostat	50 W	F08IST-50W
Cabinet heater with thermostat	100 W	F08IST-100W

Select the heater by order code. Confirm the enclosure rating with the selected cooling and cable-entry components fitted.

PROJECT CONFIGURATIONS

Special enclosures

Use these configurations to request a project-specific drawing and quotation.

IP55 wall-mount

9U, 12U and 16U

The 450 mm-deep design can be reviewed with a 553 mm body width. A 600 × 600 mm arrangement is also available for project review. Select the door and fan option with the enclosure.

IP55 floor-standing

26U and 42U

Glass and steel front doors can be specified. Plinth, three-point door locking and fan equipment are options. Specify the required overall envelope including the base.

SOHO wall-mount

450 mm project depth

Request the required U height, external width, rail positions and packing format. The 400 mm standard SOHO dimensions and order codes are listed on page 3.

FOR THE PROJECT DRAWING

Enclosure	U height, external width and depth, installation environment and design load.
Access	Front and rear door type, opening clearance, cable entry and lock type.
Supply	Fan and filter arrangement, plinth height, colour and delivery format.

Final dimensions, enclosure rating and the order code are confirmed against the selected project drawing. Standard outdoor IP66 cabinets are listed on pages 8–10.

IP66 catalogue models / p. 8

UPCOM Telekomünikasyon Bilişim Teknolojileri San. ve Tic. Ltd. Şti.
Küçüksu Mah. Rasathane Cad. No. 35R2, D. 2, 34684 Üsküdar, Istanbul, Türkiye
+90 535 765 18 57 | info@upcom.com.tr | www.upcom.com.tr

DATA CENTER SOLUTIONS

Cold aisle containment

Two rows of server cabinets enclose the supply-air aisle between them.



Installed system with sliding end doors and perforated rack doors.

Rack and aisle configuration

Design element	Configuration
Server cabinet width	600 or 780 mm
Server cabinet depth	1000, 1100 or 1200 mm
Rack construction	Perforated front and rear doors, side-by-side baying and floor fixing
Aisle roof	Polycarbonate, acrylic or tempered glass
End-door access	Automatic sliding doors with card, key or fingerprint access options



Perforated doors along an installed rack row.



Mounting rails and cable routing inside a rack.

UPCOM Telekomünikasyon Bilişim Teknolojileri San. ve Tic. Ltd. Şti.
Küçüksu Mah. Rasathane Cad. No. 35R2, D. 2, 34684 Üsküdar, Istanbul, Türkiye
+90 535 765 18 57 | info@upcom.com.tr | www.upcom.com.tr

DATA CENTER SOLUTIONS

Co-location & rack layouts

Specify separate rack compartments, the number of cabinets and the aisle footprint.

Compartment options



Two compartments




Four compartments





Mesh partition around an installed rack area.

Divide shared racks into two or four compartments. Set the cabinet count, aisle width and end-door clearance on the layout. The tops of the racks have fixing points for cable channels.

Aisle layout drawing

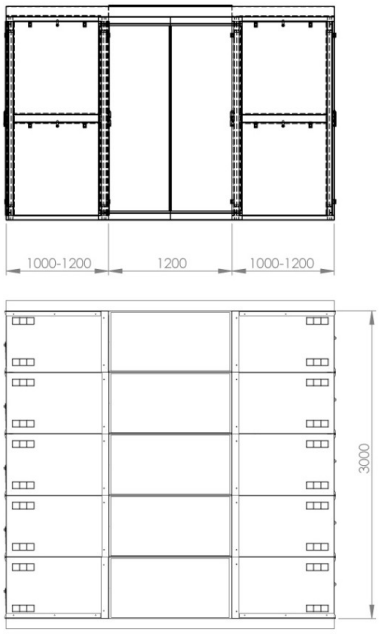

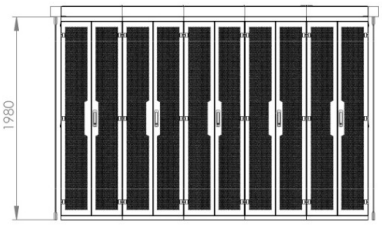





Aisle roof and end-door assembly.



Alternative rack and aisle arrangement.

Reference layout with end, side, plan and isometric views.

UPCOM Telekomünikasyon Bilişim Teknolojileri San. ve Tic. Ltd. Şti.
Küçüksu Mah. Rasathane Cad. No. 35R2, D. 2, 34684 Üsküdar, Istanbul, Türkiye
+90 535 765 18 57 | info@upcom.com.tr | www.upcom.com.tr

DATA CENTER SOLUTIONS

Micro data centers

An IT rack and adjacent cooling bay combine power, monitoring and protection in one system.



Dark finish, front closed and open.



Red finish, front closed and open.

Integrated systems

Design element	Configuration
IT equipment bay	600 or 800 mm-wide server cabinet
Cooling bay	300 mm-wide in-row unit alongside the IT rack
Power	UPS and intelligent rack PDU
Site monitoring	Environmental monitoring and access control
Fire protection	Integrated detection and suppression
Expansion	Additional cabinets can be included in the layout

PROJECT SIZING

Specify the usable rack space, equipment depth, IT load and required backup time. Cooling duty and UPS capacity follow the project load.

Reference dimensions and expanded layouts



Display and lock



Rack PDU


UPCOM Telekomünikasyon Bilişim Teknolojileri San. ve Tic. Ltd. Şti.
Küçüksu Mah. Rasathane Cad. No. 35R2, D. 2, 34684 Üsküdar, Istanbul, Türkiye
+90 535 765 18 57 | info@upcom.com.tr | www.upcom.com.tr

DATA CENTER SOLUTIONS


Micro data center layouts

Use the reference assembly to plan the footprint and access to the IT and cooling bays.

Single-rack reference assembly

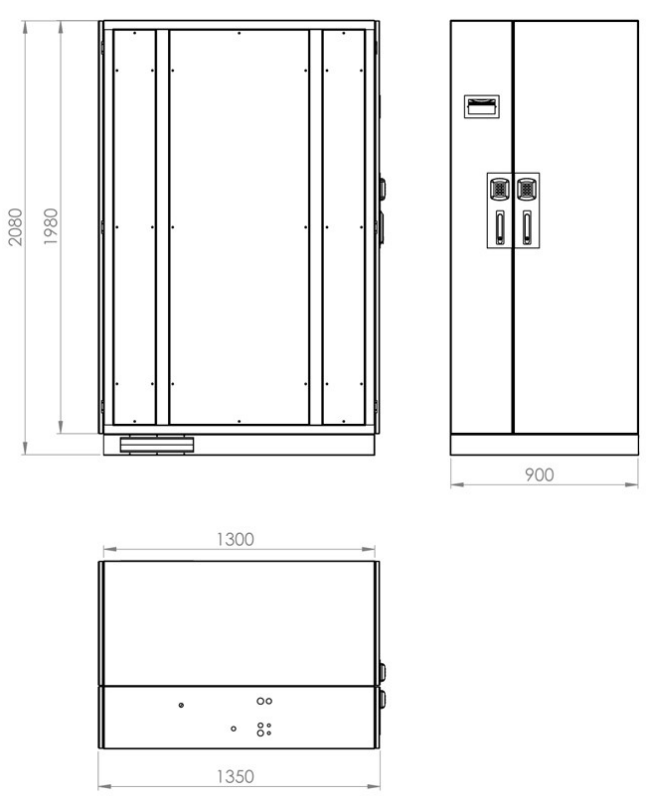


Dimensioned side, front and plan views.

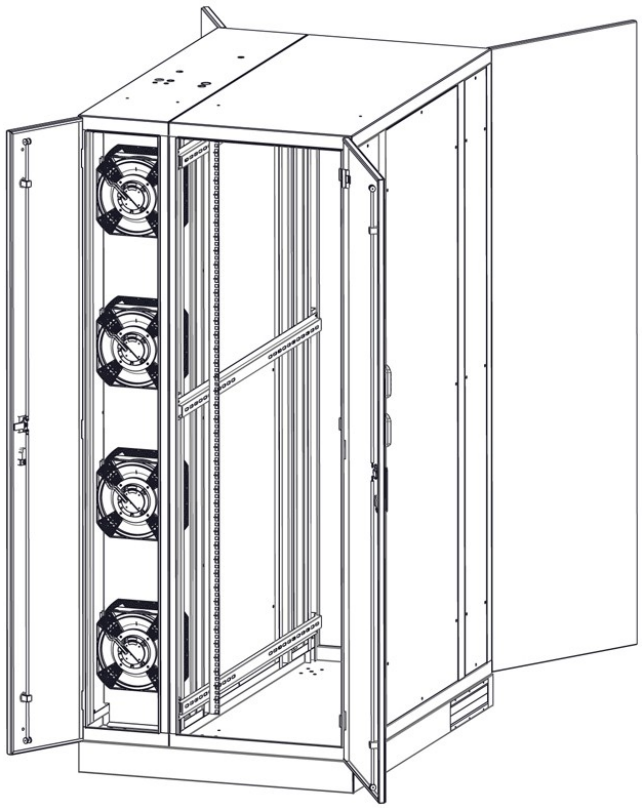

Cooling bay on the left and 19-inch rails on the right.

900 × 1350 × 2080 mm

Overall W × D × H of the assembly shown.



MULTI-CABINET LAYOUT

Adding equipment bays

The rack count can increase as the installation grows. Set the bay sequence, cooling duty and service clearances on the project drawing.

UPCOM Telekomünikasyon Bilişim Teknolojileri San. ve Tic. Ltd. Şti.
Küçüksu Mah. Rasathane Cad. No. 35R2, D. 2, 34684 Üsküdar, Istanbul, Türkiye
+90 535 765 18 57 | info@upcom.com.tr | www.upcom.com.tr

DATA CENTER SOLUTIONS

Precision cooling

Select the air delivery arrangement and the cooling technology for the server room.



Supply-air grilles in the floor of a contained aisle.



Wide precision cooling cabinet.



Narrow cooling cabinet for row installations.

Cooling selection

Design element	Configuration
Air delivery	In-row or under a raised floor
Cooling technology	Air-cooled direct expansion (DX) or chilled water (CW)
Product range	20–150 kW across the precision cooling range

DESIGN CONDITIONS

Size the unit for the heat load and design temperatures. For DX, state the outdoor design temperature. For CW, state the chilled-water supply and return temperatures.

DATA CENTER SOLUTIONS

Modular UPS

A modular uninterruptible power supply supports the protected IT load during a power interruption.



Example frame with power modules beneath the display.



Example frame with switchgear below the modules.

Power and autonomy

Selection input	How to specify
Protected load	Specify the IT load in kW and kVA, including planned growth.
Battery runtime	Specify the required minutes at the stated protected load.
Redundancy	Select the module count for the required spare capacity.

OPERATION AFTER A MODULE FAULT

The remaining modules continue to supply power. To carry the full load after one module fails, their combined available capacity must cover the protected load.

EFFICIENCY

The published efficiency figure is 97%. Confirm the figure at the proposed load and operating mode when selecting the UPS.

DATA CENTER SOLUTIONS

KVM & monitoring

Access rack-mounted servers and monitor environmental conditions across the installation.

Rack-mounted KVM console



LCD console with the drawer open.

1U DRAWER

The LCD, keyboard, touchpad and KVM switch share a single rack unit. Choose an 8-port or 16-port switch to match the server count.

IP-capable models also support remote access.

Environmental monitoring



Sensor connections and front display.

RACK-MOUNTED CONTROLLER

Select sensor types and quantities for the locations to be monitored. Conditions can be viewed remotely through a mobile application.

Sensor type	Application
Temperature and humidity	Track room or rack conditions at the selected points.
Smoke and water	Monitor smoke and water at the specified sensor locations.
Vibration	Include vibration sensing where required.

PROJECT INFORMATION

For server access, specify the port count and local or IP access. For environmental monitoring, list the sensor type, quantity and position for each rack or room.

19-INCH RACK ACCESSORIES

Shelves & fan modules

Select the shelf by cabinet depth and the fan module by mounting type.



Fixed shelf for a 600 mm-deep cabinet



Two-fan floor-standing module with on/off switch

Fixed equipment shelves

Vented steel shelves for equipment without 19-inch mounting brackets.

Nominal cabinet depth (mm)	Shelf W × D (mm)	UPCOM order code
600	460 × 345	UPC-F2166SR
800	460 × 525	UPC-F2168SR
1000	440 × 720	UPC-F21610SR

The 600 and 800 mm versions are rated for 50 kg. The 1000 mm model shown is the heavy-duty version.

Roof fan modules

Choose an on/off switch for manual operation or a thermostat for temperature control.

Cabinet type	Fans	On/off switch	Thermostat
Wall-mount	1	UPC-F021F1V	UPC-F024F1VT
Wall-mount	2	UPC-F021F2V	UPC-F024F2VT
Floor-standing	2	UPC-F022F2	UPC-F024F2T
Floor-standing	4	UPC-F022F4	UPC-F024F4T
Floor-standing	6	UPC-F022F6	UPC-F024F6T

FAN COMPATIBILITY

The 560 mm-deep Alpine Line accepts one- or two-fan wall modules. For Oxoline 600 × 600 and 600 × 800 mm cabinets, select a two- or four-fan floor-standing module.

19-INCH RACK ACCESSORIES

Shelves, drawers & fans

Select shelf depth, equipment support and digital fan controls.

Fixed and sliding shelves

Choose the cabinet's nominal depth. Shelf depth is smaller than cabinet depth.

Cabinet D (mm)	Version	Fixed shelf	Sliding shelf
600	Standard	UPC-F2166SR	UPC-F226HR
800	Standard	UPC-F2168SR	UPC-F228HR
1000	Standard-duty	UPC-F21610SREK	UPC-F2210HREK
1000	Heavy-duty	UPC-F21610SR	UPC-F2210HR

Rack-mount shelves and keyboard drawers

Accessory	Rack height	Shelf depth	UPCOM order code
Rack-mount shelf	1U	250 mm	UPC-FSHRA1U
Rack-mount shelf	1U	320 mm	UPC-F101RA1U
Rack-mount shelf	2U	350 mm	UPC-F101RA2U
Lockable keyboard drawer	1U	–	UPC-F2310KD
Lockable keyboard drawer	2U	–	UPC-F2320KD

Roof fans with digital thermostats

Mounting	Fans	UPCOM order code
Wall-mount	1	UPC-F024F1VDT
Wall-mount	2	UPC-F024F2VDT
Floor-standing	2	UPC-F024F2DT
Floor-standing	4	UPC-F024F4DT
Floor-standing	6	UPC-F024F6DT

Check the roof aperture and mounting pattern for the selected cabinet. For mechanical thermostat and on/off models, see page 19.

19-INCH RACK ACCESSORIES

Power distribution

Horizontal socket strips and vertical PDUs for cabinet-mounted equipment.



HORIZONTAL STRIPS

19-inch rack mounting.

VERTICAL STRIPS

Select by cabinet height and outlet count.

Horizontal PDUs

Schuko and IEC C13 refer to the outlet type.

Outlet type	Outlets	Protection option	UPCOM order code
Schuko	8	Standard strip	UPC-F082PR8A
IEC C13	12	Standard strip	UPC-F082PR12C13
Schuko	3	Circuit breaker	UPC-F082PR3SA
Schuko	6	Circuit breaker	UPC-F082PR6SA
Schuko	9	Circuit breaker	UPC-F082PR9SA
Schuko	12	Circuit breaker	UPC-F082PR12SA

Vertical PDUs with circuit breaker

Cabinet height	Outlet arrangement	Version	UPCOM order code
26U	12 (6 + 6)	Standard	UPC-F082PR26U
32U	12 (6 + 6)	Standard	UPC-F082PR32U
36U	18 (9 + 9)	Standard	UPC-F082PR36U
42U	18 (9 + 9)	Standard	UPC-F082PR42U
42U	18 (9 + 9)	IEC C13	UPC-F082PR42UC13

Confirm the input plug, current rating and cable length for the selected PDU before ordering.

19-INCH RACK ACCESSORIES

Cable management

Horizontal organisers, vertical cable managers and cable trays for rack installations.



HORIZONTAL ROUTING

Support patch cords at the equipment face.

VERTICAL ROUTING

Guide cable bundles along the cabinet sides.

Horizontal organisers

Type	Rack format	UPCOM order code
Cable management panel	1U	UPC-F056501U
Cable management panel	2U	UPC-F056502U
Panel with brush	1U	UPC-F0565F01UTY
Panel with cover	1U	UPC-F0565K01U
Individual cable ring	1U	UPC-F05650T
Individual cable ring	2U	UPC-F05650T2

Vertical cable management

Both types are supplied in pairs. Select the height to match the mounting layout.

Rack height	Cable manager set	Cable tray set
16U	–	UPC-F057DKK16U
20U	–	UPC-F057DKK20U
26U	UPC-F057D026U	UPC-F057DKK26U
32U	UPC-F057D032U	UPC-F057DKK32U
36U	UPC-F057D036U	UPC-F057DKK36U
39U	UPC-F057D039U	UPC-F057DKK39U
42U	UPC-F057D042U	UPC-F057DKK42U
44U	UPC-F057D044U	UPC-F057DKK44U

Confirm clearance for vertical accessories and side-entry cables in the selected enclosure.

19-INCH RACK ACCESSORIES

Mounting & finishing

Blanking panels, support brackets, castors and hardware for completing the installation.

Panels and equipment support

19-inch blank panel	UPCOM order code
1U	UPC-F111KP1U
2U	UPC-F111KP2U
3U	UPC-F111KP3U
4U	UPC-F111KP4U
5U	UPC-F111KP5U
6U	UPC-F111KP6U

L-bracket pair	UPCOM order code
600 mm depth	UPC-F0236-L
800 mm depth	UPC-F0238-L
1000 mm depth	UPC-F02310-L

Select the left and right support pair by the cabinet's nominal depth.

Castors and levelling feet



Accessory	UPCOM order code
Floor cabinet castor set	UPC-F041TKR
Wall cabinet castor set	UPC-F042TKR
Levelling feet, set	UPC-F041AYK
Small levelling feet, set	UPC-F043KCAYK


Installation hardware and lighting

Accessory	Option / pack size	UPCOM order code
M6 cage nuts, washers and screws	20 sets	UPC-F220VSP20
M6 cage nuts, washers and screws	50 sets	UPC-F220VSP50
M6 cage nuts, washers and screws	100 sets	UPC-F220VSP100
Rack light	On/off switch	UPC-F0126KA01
Rack light	Automatic switch	UPC-F0126KA02
Earthing bar	Cabinet bonding	UPC-F113TB
Floor anchoring bracket	All 600 mm cabinets	UPC-F114ZB6
Floor anchoring bracket	All 800 mm cabinets	UPC-F114ZB8

CABINETS & ACCESSORIES

Cabinet installation views

Indoor and outdoor enclosures shown with their mounting and access details.

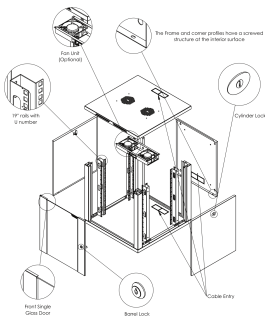

Alpine Line wall cabinet

Exploded view of the 600 mm-deep cabinet, with its removable panels and mounting rails.



26U server cabinet

600 × 1000 mm cabinet with a perforated front door. The castors shown are optional.



IP66 wall cabinet

The raised roof cover exposes the top section for service. The front door gives access to the rails.



Roof fan detail

Two fans and the temperature control panel are visible in this wall cabinet configuration.



IP66 floor cabinet

Door open on a 12U, 600 × 450 mm field cabinet. The plinth is visible beneath the enclosure.



IP66 pole cabinet

Rear mounting points and cable entry on a pole installation. Camera housings shown for context.

UPCOM Telekomünikasyon Bilişim Teknolojileri San. ve Tic. Ltd. Şti.
Küçüksu Mah. Rasathane Cad. No. 35R2, D. 2, 34684 Üsküdar, Istanbul, Türkiye
+90 535 765 18 57 | info@upcom.com.tr | www.upcom.com.tr

CABINETS & ACCESSORIES

Rack accessory views

Mounting details and product shapes for identifying the accessories in the ordering tables.



Sliding equipment shelf

Extended shelf for a nominally 600 mm-deep cabinet. The side runners are visible.



1U keyboard drawer

Lockable 19-inch drawer, shown partially extended.



1U rack-mount shelf

250 mm-deep shelf with front rack-mount ears.



Wall cabinet fan module

Two-fan housing with the control panel on the module edge.



Three-outlet Schuko strip

Horizontal power strip with a circuit breaker and 19-inch mounting ears.



M6 mounting hardware

Cage nut, cup washer and screw used to fasten equipment to the rack rails.